


Open Frame Touch Monitor

HO 165 PTB

15.6" / 39,6cm Diagonal
LED Backlight – Format 16:9

- 1920 x 1080 Resolution Full HD 1080P
- 10-Point Touch P-Cap Technology
- 170° Wide Viewing Angle
- Triple Input: HDMI + DP + VGA
- IP65 Rating Level
- Display Protection: Thickness 3.9mm
- 24/7 Operating
- Built-in Speakers
- 12 Volt External Power Supply
- Touch-Through Glass
- Sturdy Metal Case
- VESA Mount and Multiple Mounting Options
- Orientation: Landscape, Portrait, Face-Up



15.6" / 39,6 cm

Part. No.: HO 165 PTB

SIZE, RESOLUTION



15.6"
16:9 Aspect Ratio

CONNECTIVITY, IP LEVEL



VGA
HDMI
Display Port

VIEWING ANGLE, VESA




170° Wide
Viewing Angle

OTHER FEATURES



Operating
24 Hours / 7 Days



Full HD
1920 x 1080



IP 65
Water & Dust
Protection




VESA
Wall-Mountable



Speakers

Display Size	39.6 cm / 15.6" Diagonal
Panel Type	TFT – LED Backlight
Aspect Ratio	16:9
Resolution (H x V)	1920 x 1080 Full HD
Brightness	250 cd/m ² (Panel) – 212 cd/m ² (Monitor)
Contrast (Typ.)	700:1 (Typical) – 10M:1 (Active Contrast)
Display Area	345,23 x 194,54 mm
Viewing Angle L/R; U/D	170° H / 170° V (CR > 10)
Response Time	25 msec
Pixel Pitch	0.17925 (H) X 0.17925 (V) mm
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass Cover Glass+LOCA+ITO (Indium Tin Oxide) Glass
Display Colors	262K Colors
Horizontal Frequency	31.5 ~ 80 kHz
Vertical Frequency	60 ~ 75 Hz
Max Display Frequency	1920 x 1080 @ 60Hz
Input 1	VGA
Input 2	HDMI
Input 3 / 4	Display Port / USB for Touch
Speakers	Yes, 1.5W x 2
Power Consumption	On: 6.98W; Stand-by: 0.21W; Off: 0.20W
AC Power Range	External Power Supply: 12 Volt / 2.5A Input: AC 100 ~ 240 Volt; 50 ~ 60 Hz
Product Dimensions	387.3 x 39.8 x 236.4 mm (W x D x H)
Packing Dimensions	- x - x - mm (W x D x H) (TBC)
Net / Gross Weight	2.46 Kg / - Kg (TBC)

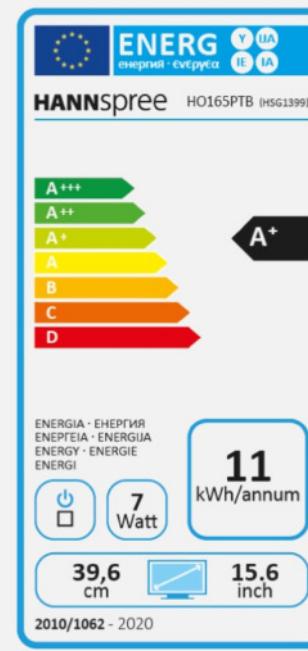

VESA Mounting	100 x 100 mm
Display Protection	TP Module Protection Thickness 3,9
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%
IP Rating Level	IP 65 ** (Front), Water and Dust Protection
Control	Menu/Exit,Bri (+),Vol (-) , Input/Enter,Power
LED Backlight life	15.000 hours
Accessory	Power Adaptor; EU and UK Power Cables (1.5mt); HDMI Cable (1.5mt); USB 2.0 (B-A) Cable (1.8mt)
Certifications	CE, RoHS, EU Energy Label
On Screen Display	8 Languages
Color	9300, 6500, 5300, User Mode
Preset Mode	Standard, Text, Movie, Game Modes
Orientation	Landscape, Portrait, Face-Up

Supplier's Name	HANNSpree
Model Name	HO165PTB
Energy Efficiency Class	A+
Screen Size (Centimetres)	39,6
Screen Size (Inches)	15.6
On mode power Consumption (W)	7
Annual Energy Consumption* (kWh)	11
Standby-mode Power Consumption (W)	0,21
Off-mode Power Consumption (W)	0,20
Screen Resolution	1920 x 1080

PART. NO.:
HO 165 PTB





4 711404 023033 >

HANNspree

HO 165 PTB
15.6" Open Frame Touch Monitor

Experts in Display




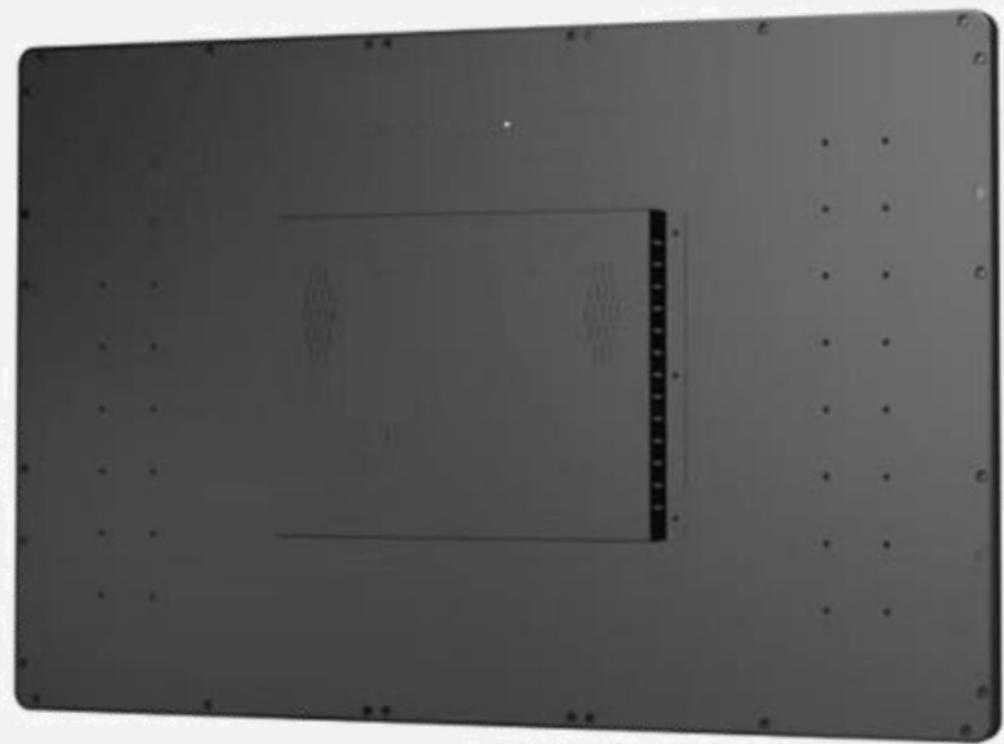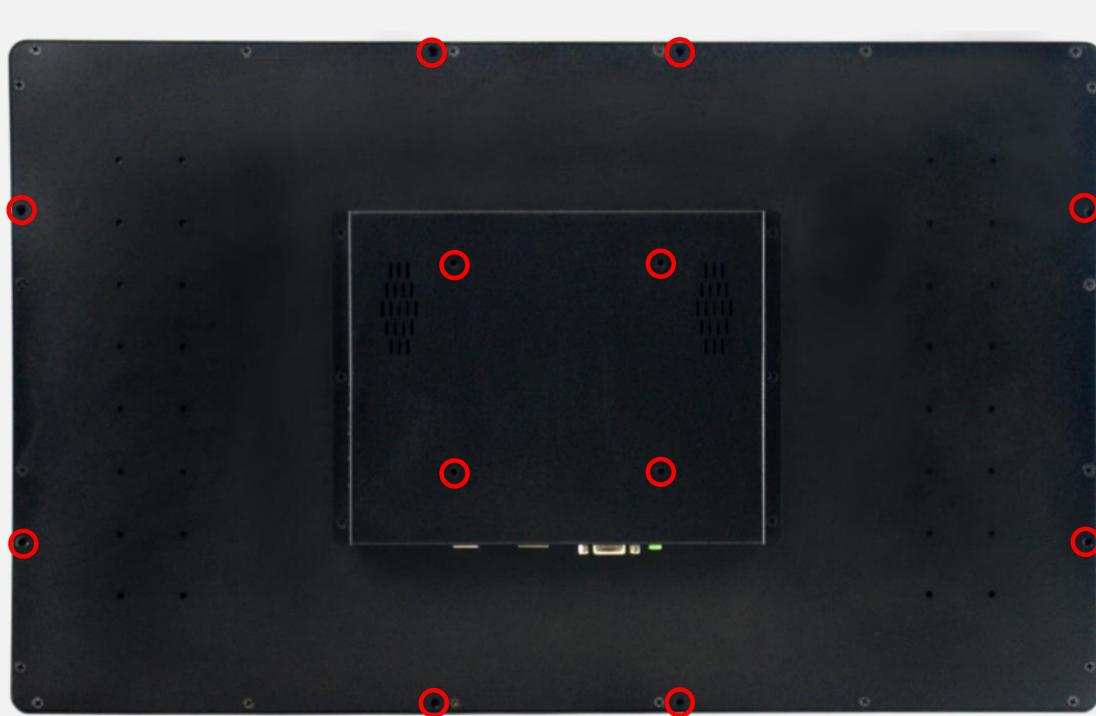


Front Cover :

Full Flat Design

Screws: M4 x 10mm (max), pitch 0.7, UNC type

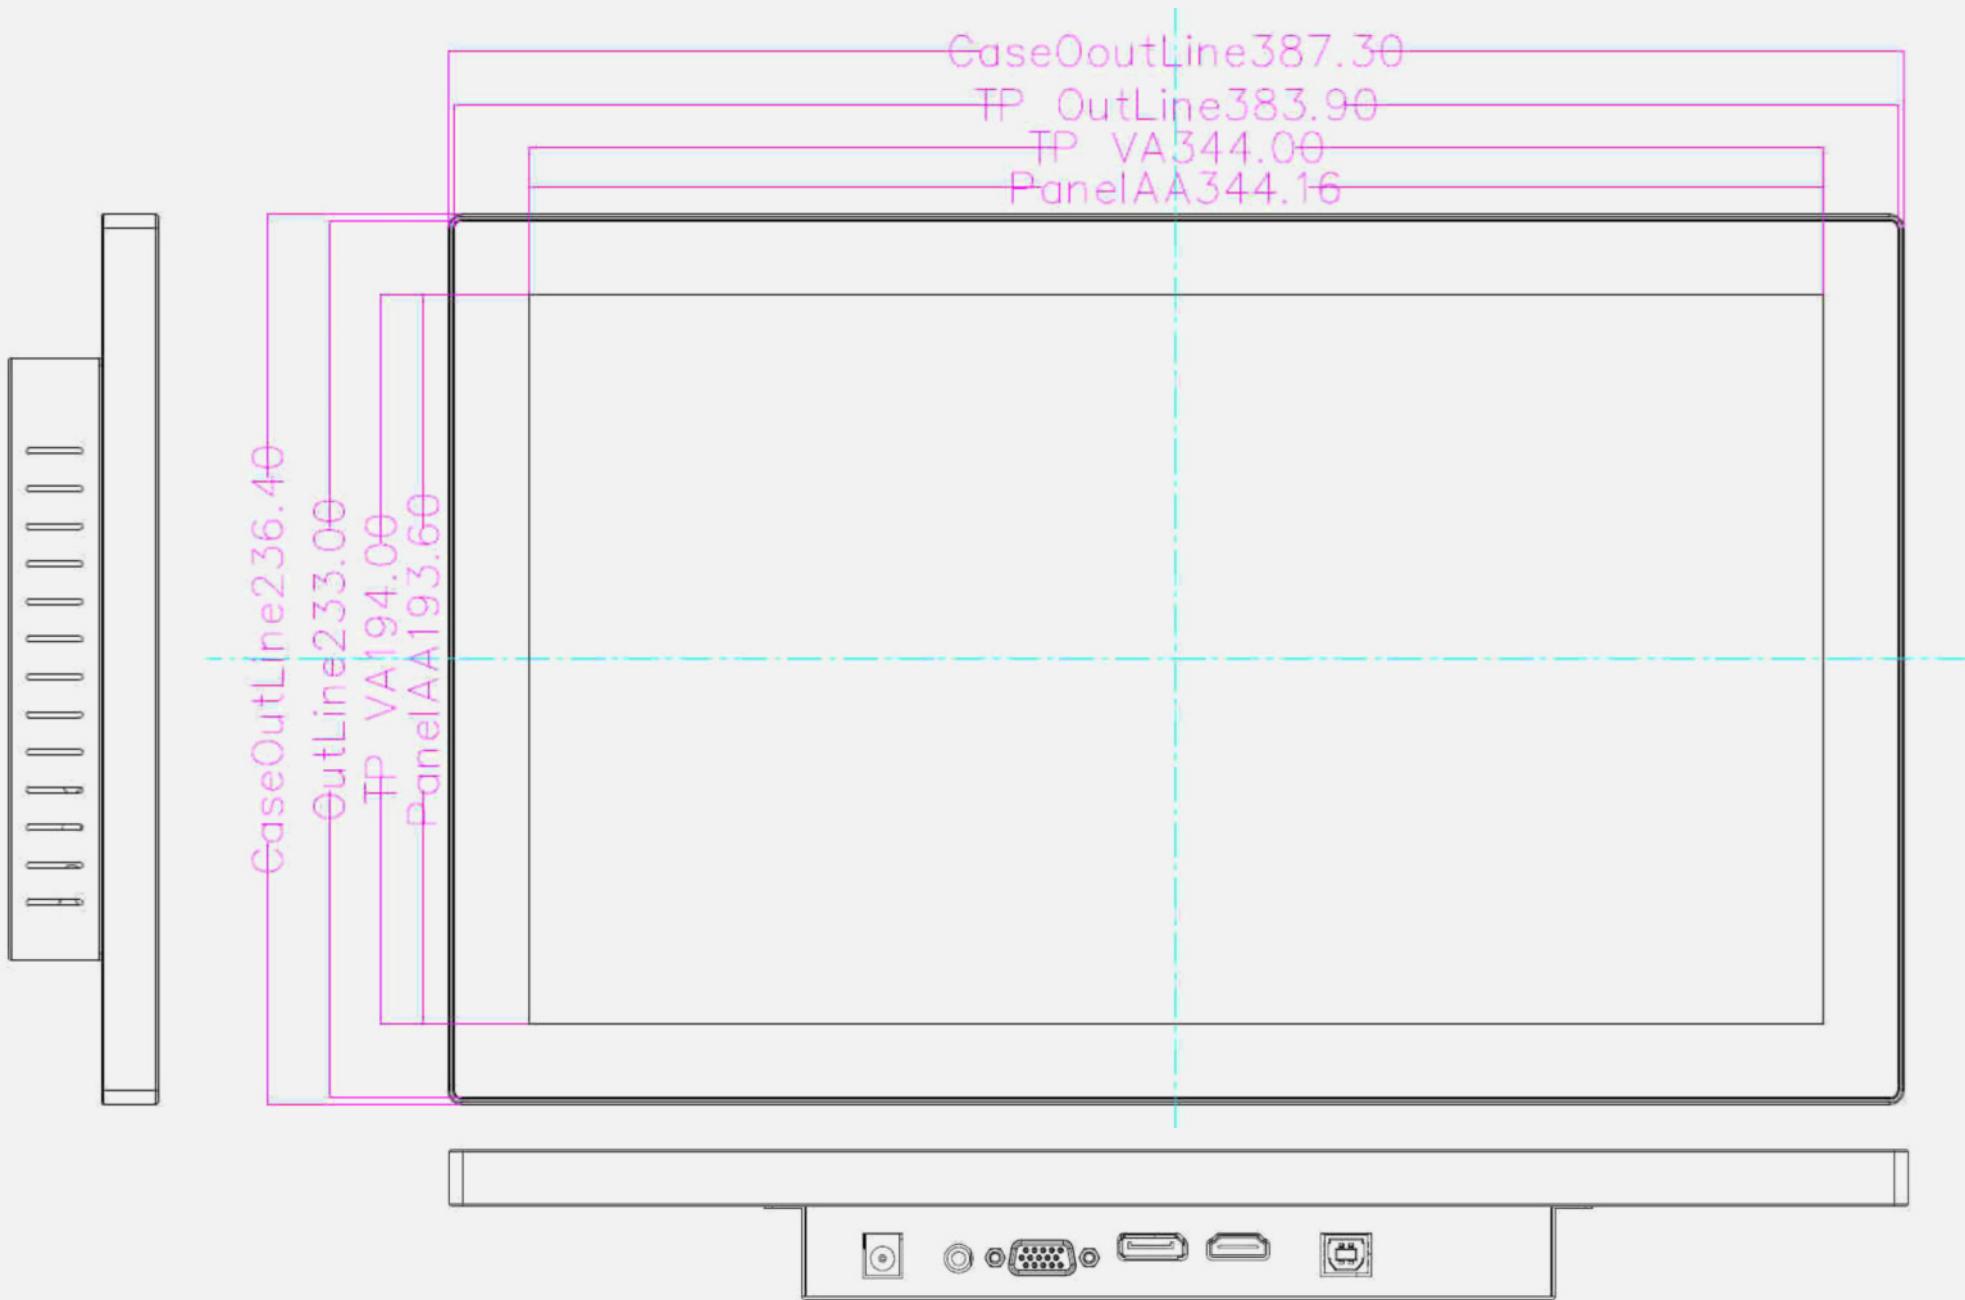

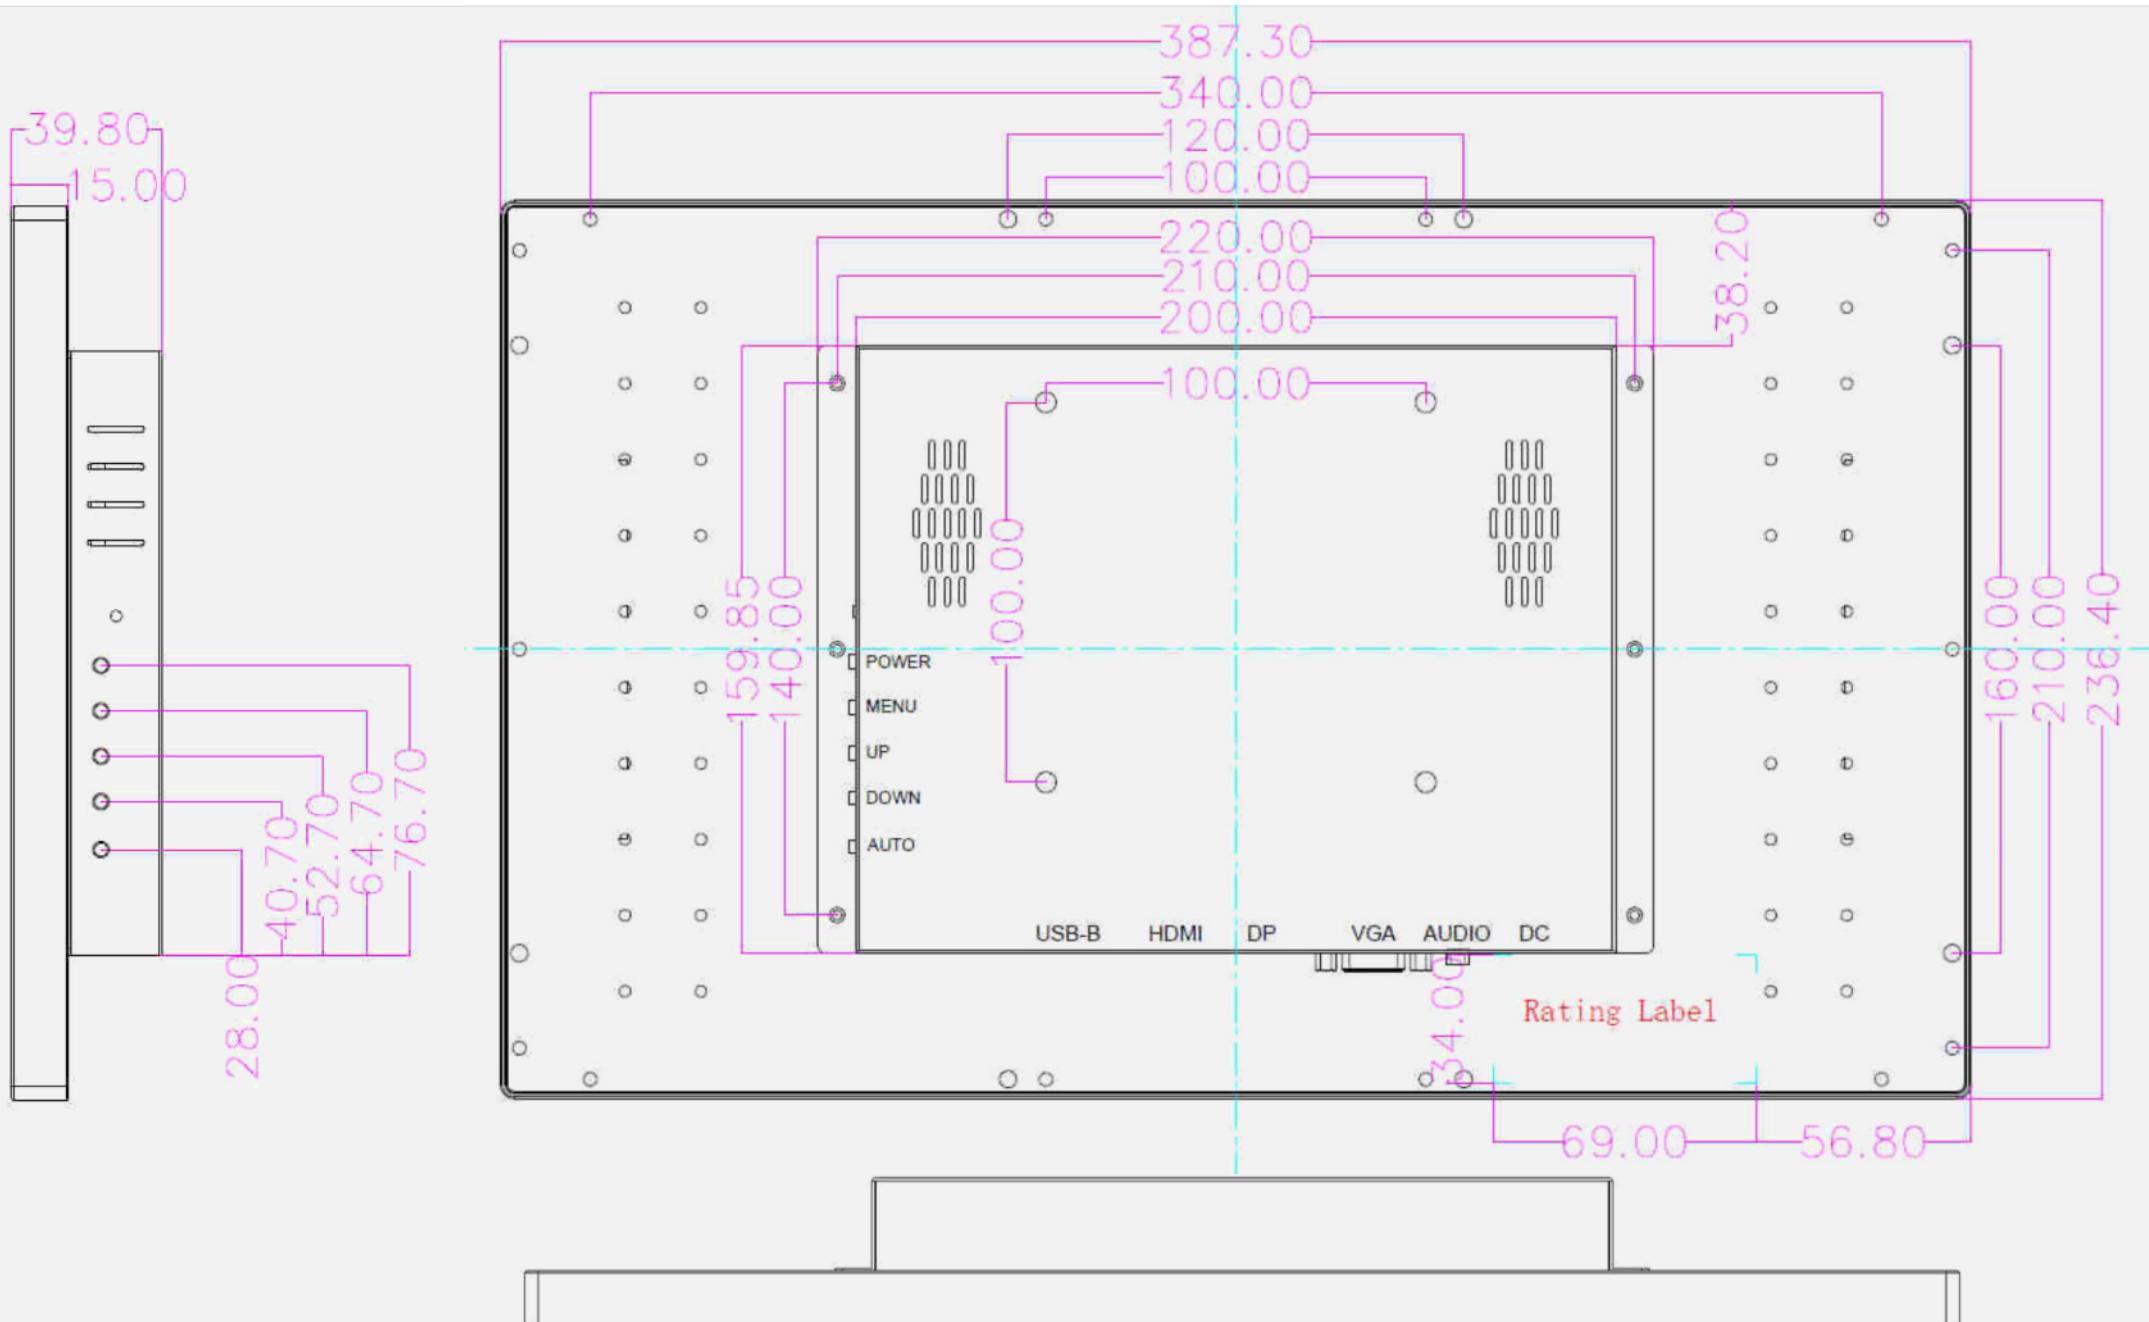

HANNSpree

HO 165 PTB
15.6" Open Frame Touch Monitor

Experts in Display

