

swissbit®

Product Data Sheet

FIDO2 Hardware Authenticator

iShield Key 2 Series USB-A / C with NFC

Date: October 5, 2026
Revision: 1.4



Contents

1. PRODUCT SUMMARY	3
2. PRODUCT FEATURES	4
3. ORDERING INFORMATION	5
4. PRODUCT DESCRIPTION	10
5. USB ELECTRICAL INTERFACE	13
6. ELECTRICAL SPECIFICATION	14
7. CONTACTLESS / NFC INTERFACE	14
8. PACKAGE MECHANICAL	15
9. FUNCTIONALITY	16
10. FEATURES	16
11. PART NUMBER DECODER	16
12. MARKING SPECIFICATION	17
13. REVISION HISTORY	18

iShield Key Series USB-A / USB-C, NFC

1. Product Summary

Mechanical Details	Form Factor / Device Type
USB-A: 54,6 x 16,0 x 5,2 mm, 5g USB-C: 50,9 x 16,0 x 5,2 mm, 5g Housing Color: RAL 9005 (Black) Rear Touch sensor, keychain hole Water resistant, robust construction IP68	CCID Smartcard, FIDO2 HID device USB-A/USB-C device with NFC interface Multicolor RGB LED with dual-sided illumination
Temperature Range	Certifications
Operational: -25 °C to 70 °C Storage: -25 °C to 85 °C	FIDO2 Authenticator Level 2 Certified (CTAP2.1) FIDO U2F Certified (CTAP1)
Platforms Supported	
Operating Systems: Browsers:	Windows 10/11, macOS, iOS, iPadOS, Linux, ChromeOS, Android Firefox, Microsoft Edge, Google Chrome, Apple Safari
Features	
Chip: Chip OS: Flash Memory: Certifications: Algorithms:	NXP P71D600 JCOP 4.5 600 KB FIPS140-3 L3: Cryptographic Module Validation Program CSRC (nist.gov) Common Criteria EAL6+: https://www.commoncriteriaportal.org/files/epfiles/NSCIB-CC-2300127-01_CR.pdf RSA: PIV: 2048, 3072, 4096 ECC: PIV: P-256, P-384, P-521 ECC: FIDO: ES256 AES: 128, 192, 256
Optional Features	
Options	MIFARE® DESFire® EV3, HID® SEOS®, LEGIC advant, LEGIC neon, FIDO Enterprise Attestation
Shipping Information	
Options	CSV file containing production batch, manufacturing batch, serial numbers
Compliance	
CE, FCC, UKCA, RoHS, WEEE, REACH, TAA, MIL-STD810H, JESD22-A104, JESD22-A103, JESD22-A108, JESD22-A102D, IEC 60068-2-27, JESD22-B110, IEC 60068-2-6, IEC 61000-4-2	

MIFARE and DESFire are registered trademarks of NXP B.V. HID and SEOS are trademarks or registered trademarks of HID Global Corporation or its licensors in the U.S. and other countries. LEGIC, LEGIC advant and LEGIC neon are trademarks of LEGIC Identisystems Ltd. All other trademarks are the property of their respective owners.

2. Product Features

Technology & Features



Digital Authentication

- **Compatibility** with hundreds of services (Google, Microsoft, AWS etc.)
- **Multi-Protocol Support:**
 - **FIDO2** (passwordless login, phishing protection)
 - Storage of up to **300 passkeys**
 - **HOTP & TOTP** (One-Time Passwords)
 - **PIV** (smartcard functionality)

Access Control

- **MIFARE** (offers additional features such as payment, membership cards or digital tickets)
- Optional: **HID SEOS, LEGIC advant/neon**

Certifications

- FIDO2-certified
- FIPS140-3 Level 3
- OpenSC compatibility
- Enterprise Attestation (optional)

Feature	 iShield Key 2 FIDO2	 iShield Key 2 FIDO2 & Access Control	 iShield Key 2 Pro	 iShield Key 2 Pro & Access Control
FIDO2 (CTAP 2.1)	✓	✓	✓	✓
PIV (Smartcard)			✓	✓
OTP (HOTP, TOTP)			✓	✓
300 Passkeys	✓	✓	✓	✓
NFC	✓	✓	✓	✓
Access Control (MIFARE DESFire EV3, HID Seos or Legic advant/neon)		✓		✓
FIPS 140-3 Level 3 (optional)	✓	✓✓	✓	✓✓

3. Ordering Information

Table 1: Standard Product List

Product Type		Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2	PK2000IA0000E-2002-1AA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1
			PK2000IA0000E-2002-1AA-SBB <i>(Delivery in single packaging)</i>	
	USB-A NFC	iShield Key 2 Pro	PK2000IA0000E-2002-1BA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible
			PK2000IA0000E-2002-1BA-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 FIDO2	PK2000IC0000E-2002-1AA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1
			PK2000IC0000E-2002-1AA-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro	PK2000IC0000E-2002-1BA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible
			PK2000IC0000E-2002-1BA-SBB <i>(Delivery in single packaging)</i>	

MIFARE®

Product Type		Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 MIFARE	PK2000IA0000E-2002-1AB-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 MIFARE® DESFire® EV3
			PK2000IA0000E-2002-1AB-SBB <i>(Delivery in single packaging)</i>	
	USB-A NFC	iShield Key 2 Pro MIFARE	PK2000IA0000E-2002-1BB-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible MIFARE® DESFire® EV3
			PK2000IA0000E-2002-1BB-SBB <i>(Delivery in single packaging)</i>	

	USB-C NFC	iShield Key 2 FIDO2 MIFARE	PK2000IC0000E-2002-1AB-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 MIFARE® DESFire® EV3
			PK2000IC0000E-2002-1AB-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro MIFARE	PK2000IC0000E-2002-1BB-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible MIFARE® DESFire® EV3
			PK2000IC0000E-2002-1BB-SBB <i>(Delivery in single packaging)</i>	

FIPS

Product Type		Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 FIPS	PK2000IA0000E-2002-1DA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 FIPS140-3 L3
			PK2000IA0000E-2002-1DA-SBB <i>(Delivery in single packaging)</i>	
	USB-A NFC	iShield Key 2 Pro FIPS	PK2000IA0000E-2002-1CA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible FIPS140-3 L3
			PK2000IA0000E-2002-1CA-SBB <i>(Delivery in single packaging)</i>	

	USB-C NFC	iShield Key 2 FIDO2 FIPS	PK2000IC0000E-2002-1DA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 FIPS140-3 L3
			PK2000IC0000E-2002-1DA-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro FIPS	PK2000IC0000E-2002-1CA-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible FIPS140-3 L3
			PK2000IC0000E-2002-1CA-SBB <i>(Delivery in single packaging)</i>	

HID®

Product Type		Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 HID	PK2000IA0000E-2002-1AD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HID® SEOS®
			PK2000IA0000E-2002-1AD-SBB <i>(Delivery in single packaging)</i>	
	USB-A NFC	iShield Key 2 Pro HID	PK2000IA0000E-2002-1BD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible HID® SEOS®
			PK2000IA0000E-2002-1BD-SBB <i>(Delivery in single packaging)</i>	

	USB-C NFC	iShield Key 2 FIDO2 HID	PK2000IC0000E-2002-1AD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HID® SEOS®
			PK2000IC0000E-2002-1AD-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro HID	PK2000IC0000E-2002-1BD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible HID® SEOS®
			PK2000IC0000E-2002-1BD-SBB <i>(Delivery in single packaging)</i>	

Product Type		Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 FIPS HID	PK2000IA0000E-2002-1DD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 FIPS140-3 L3 HID® SEOS®
			PK2000IA0000E-2002-1DD-SBB <i>(Delivery in single packaging)</i>	
	USB-A NFC	iShield Key 2 Pro FIPS HID	PK2000IA0000E-2002-1CD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible FIPS140-3 L3 HID® SEOS®
			PK2000IA0000E-2002-1CD-SBB <i>(Delivery in single packaging)</i>	

	USB-C NFC	iShield Key 2 FIDO2 FIPS HID	PK2000IC0000E-2002-1DD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 FIPS140-3 L3 HID® SEOS®
			PK2000IC0000E-2002-1DD-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro FIPS HID	PK2000IC0000E-2002-1CD-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible FIPS140-3 L3 HID® SEOS®
			PK2000IC0000E-2002-1CD-SBB <i>(Delivery in single packaging)</i>	

LEGIC neon

Product Type		Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 LEGIC neon	PK2000IA0000E-2002-1AC-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 LEGIC neon
			PK2000IA0000E-2002-1AC-SBB <i>(Delivery in single packaging)</i>	
	USB-A NFC	iShield Key 2 Pro LEGIC neon	PK2000IA0000E-2002-1BC-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible LEGIC neon
			PK2000IA0000E-2002-1BC-SBB <i>(Delivery in single packaging)</i>	

	USB-C NFC	iShield Key 2 FIDO2 LEGIC neon	PK2000IC0000E-2002-1AC-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 LEGIC neon
			PK2000IC0000E-2002-1AC-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro LEGIC neon	PK2000IC0000E-2002-1BC-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible LEGIC neon
			PK2000IC0000E-2002-1BC-SBB <i>(Delivery in single packaging)</i>	

Product Type	Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 FIPS LEGIC neon	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 FIPS140-3 L3 LEGIC neon
		PK2000IA0000E-2002-1DC-SBT <i>(Delivery in tray)</i>	
	USB-A NFC	iShield Key 2 Pro FIDO2 FIPS LEGIC neon	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible FIPS140-3 L3 LEGIC neon
		PK2000IA0000E-2002-1CC-SBT <i>(Delivery in tray)</i>	
	USB-C NFC	iShield Key 2 FIDO2 FIPS LEGIC neon	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 FIPS140-3 L3 LEGIC neon
		PK2000IC0000E-2002-1DC-SBT <i>(Delivery in tray)</i>	
	USB-C NFC	iShield Key 2 Pro FIDO2 FIPS LEGIC neon	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible FIPS140-3 L3 LEGIC neon
		PK2000IC0000E-2002-1CC-SBT <i>(Delivery in tray)</i>	

LEGIC advant

Product Type	Product Series	Part Number	Supported Standards / Features
	USB-A NFC	iShield Key 2 FIDO2 LEGIC advant	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 LEGIC advant
		PK2000IA0000E-2002-1AE-SBT <i>(Delivery in tray)</i>	
	USB-A NFC	iShield Key 2 Pro FIDO2 LEGIC advant	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible LEGIC advant
		PK2000IA0000E-2002-1BE-SBT <i>(Delivery in tray)</i>	
	USB-C NFC	iShield Key 2 FIDO2 LEGIC advant	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible LEGIC advant
		PK2000IC0000E-2002-1BE-SBT <i>(Delivery in tray)</i>	

	USB-C NFC	iShield Key 2 FIDO2 LEGIC advant	PK2000IC0000E-2002-1AE-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 LEGIC advant
			PK2000IC0000E-2002-1AE-SBB <i>(Delivery in single packaging)</i>	
	USB-C NFC	iShield Key 2 Pro LEGIC advant	PK2000IC0000E-2002-1BE-SBT <i>(Delivery in tray)</i>	WebAuthn, FIDO2/CTAP2 Universal 2nd Factor (U2F) CTAP1 HOTP (Event) TOTP (Time) Smartcard (PIV-compatible) OpenSC-compatible LEGIC advant
			PK2000IC0000E-2002-1BE-SBB <i>(Delivery in single packaging)</i>	

4. Product Description

The Swissbit iShield Key 2 is a multi-purpose hardware security key designed for phishing-resistant authentication and secure digital identity in enterprise, industrial, and other security-sensitive environments. It supports FIDO2 and FIDO U2F, provides storage for up to 300 passkeys, and supports Enterprise Attestation on selected variants.

The iShield Key 2 is available with USB-A or USB-C and NFC, enabling touch-based authentication via USB and tap-and-go authentication via NFC, including use with compatible mobile devices. It supports major desktop and mobile operating systems and commonly used web browsers.

Depending on the product variant, the iShield Key 2 additionally supports PIV-based PKI, HOTP, TOTP, and static passwords. Physical access technologies including MIFARE DESFire EV3, HID Seos, and LEGIC advant/neon can also be integrated, allowing digital authentication and physical access functionality to be combined in a single authenticator.

Designed for demanding environments and long-term deployment, the iShield Key 2 supports an operating temperature range from -25 °C to +70 °C. Firmware and applications can be securely updated in the field, allowing security updates and functional enhancements to be deployed throughout the product lifecycle.

4.1 Current Consumption

The drive-level current consumption as a function of operating mode is shown in Table 2.

Table 2: Current Consumption

Interface	Initialization	Idle	Unit
USB 2.0	30	19.5	mA

4.2 Environmental Specifications

4.2.1 Recommended Operating Conditions

The recommended operating conditions for the iShield Key Series are provided in Table 3.

Table 3: Recommended Operating Conditions¹

Parameter	Value
Extended Operating Temperature	-25 °C to 70 °C
Power Supply V _{CC} Voltage	5,0 V ± 10%

4.2.2 Recommended Storage Conditions

The recommended storage conditions are listed in Table 4.

Table 4: Recommended Storage Conditions

Parameter	Value
Extended Storage Temperature	-25 °C to 85 °C

4.2.3 Shock, Vibration and Humidity

The maximum shock, vibration and humidity conditions are listed in Table 5.

Table 5: Shock, Vibration and Humidity

Parameter	Value
Non-Operating Shock	1,500 g, 0,5 ms pulse duration, half-sine wave (IEC 60068-2-27, JESD22-B110)
Non-Operating Vibration	50 g, 10Hz – 2000Hz, 3 axes (IEC 60068-2-6)
Humidity (Non-Condensing)	85% RH 85 °C, 330 hrs, max. supply voltage (JESD22-A101)

¹ Adequate airflow is required to ensure the temperature.

4.3 Regulatory Compliance

The iShield Key Series USB-A / C with NFC comply with the regulations / standards listed in Table 6.

Table 6: Regulatory Compliance

Regulation/ Standard	Description
EMC	CE – 2014/30/EU FCC – 47 CFR Part 15 UKCA – S.I. 2016 No. 1091
RoHS	2011/65/EU with 2015/863/EU and 2017/2102/EU
REACH	1907/2006/EU and 207/2011/EU
WEEE	2012/19/EU
TAA	Trade Agreements Act (TAA)
MIL-STD810H	DoD test method standard
JESD22-A104	Temperature cycling testing
JESD22-A103	High temperature storage life
JESD22-A108	Temperature, Bias, Operating Life
AEC Q100-008	Early Life Failure Rate
JESD22-A102D	Accelerate Moisture Resistance
IEC 60068-2-27	Non-repetitive or repetitive shocking
JESD22-B110	Mechanical shock
IEC 60068-2-6	Environmental testing: Vibration
IEC 61000-4-2	ESD testing

4.4 Mechanical Specifications

Physical dimensions are detailed in Table 7. Figure 3 illustrates the iShield Key dimensions.

Table 7: Physical Dimensions

Physical Dimensions			
	USB-A	USB-C	Unit
Length	54.6 ±0.2	50.9 ±0.2	mm
Width	16.00 ±0.2	16.00 ±0.2	
Thickness (Max)	5.2 ±0.2	5.2 ±0.2	
Weight (Max)	5 ±0.2	5 ±0.2	g

4.5 Reliability

FIT and MTBF calculation

The Mean Time Between Failures (MTBF) for the Swissbit® iShield Key Hardware Authenticator is specified to exceed the value listed in the following Table 8.

Table 8: MTBF

Parameter	Value
MTBF (at 25 °C)	> 10,000,000 hours

5. USB Electrical Interface

The signal/pin assignments and descriptions for USB2 Type-A are listed in Table 9.

Figure 1: USB2 Type-A connector pinout





Table 9: Pin Assignment, Name and Description

Pin	Signal Name	Description
1	V_Bus	Operating voltage
2	D-	Data signal pair
3	D+	Data signal pair
4	GND	Power Ground

The signal/pin assignments and descriptions for USB2 Type-C are listed in Table 9.

Figure 2: USB2 Type-C connector pinout

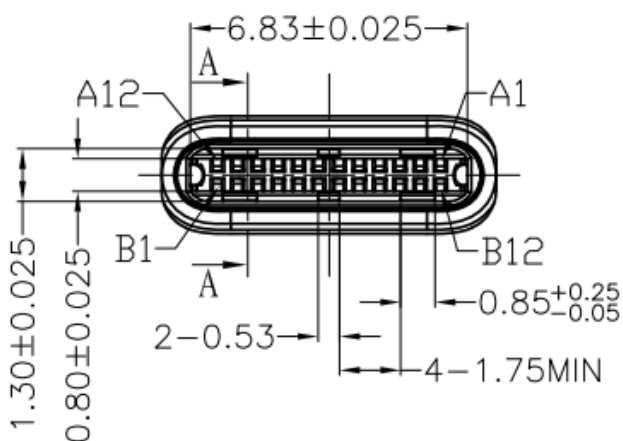

PIN ASSIGNMENT(REF.)

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	VBUS	SBU1	D-	D+	CC	VBUS	TX1-	TX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
GND	TX2+	TX2-	VBUS	VCONN			SBU2	VBUS	RX1-	RX1+	GND

6. Electrical Specification

Table 10: Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Power Supply Voltage	V_Bus	-0.5	6.0	V
Voltage at D+ and D-	V_Data	-0.5	5.0	

7. Contactless / NFC Interface

Table 11: NFC Interface specifications

Parameter	Specification
Interface	Contactless / NFC
Operating frequency	13.56 MHz
Contactless standard	ISO/IEC 14443 Type A
Interface type	Passive, reader-powered

8. Package Mechanical

Figure 3: iShield Key USB-A / NFC


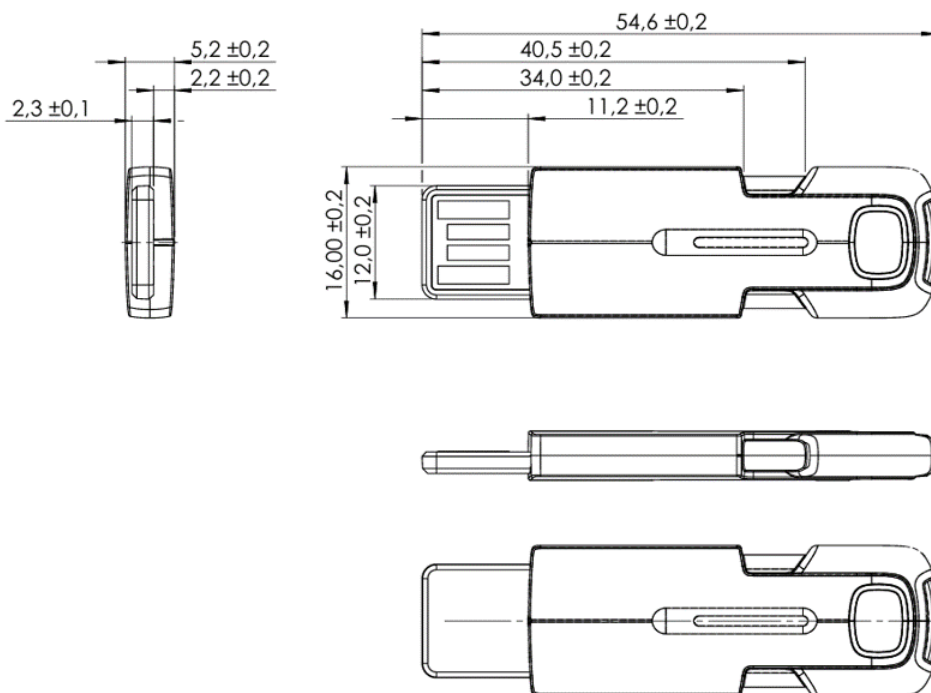


Figure 4: iShield Key USB-C / NFC

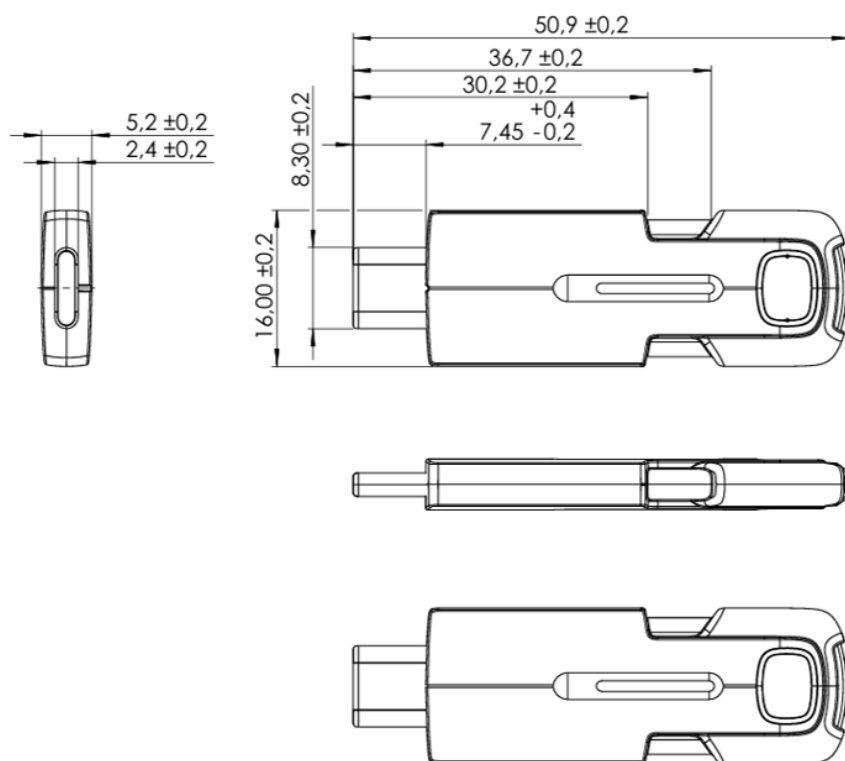

9. Functionality

See the following Table 12 for a list of functionality.

Table 12: Function

Function	Value
Communication interface	USB-A/USB-C, NFC
Supported Standards <i>(available in iShield Key Pro)</i>	HOTP / TOTP / PIV / U2F / FIDO2 (CTAP 2.1)
Protocols	Mifare DESFire EV3, LEGIC advant/neon, HID SEOS


10. Features

See the following Table 13: for a list of features.

Table 13: Features

Function	Interface	Value
FIDO2	USB / NFC	U2F / FIDO2 (CTAP 2.1)
PIV	USB / NFC	PIV / OpenSC
Passcode	USB / NFC	TOTP / HOTP / PASSWORD
MIFARE	NFC	DESFire EV3
HID	NFC	SEOS
LEGIC	NFC	advant / neon

11. Part Number Decoder

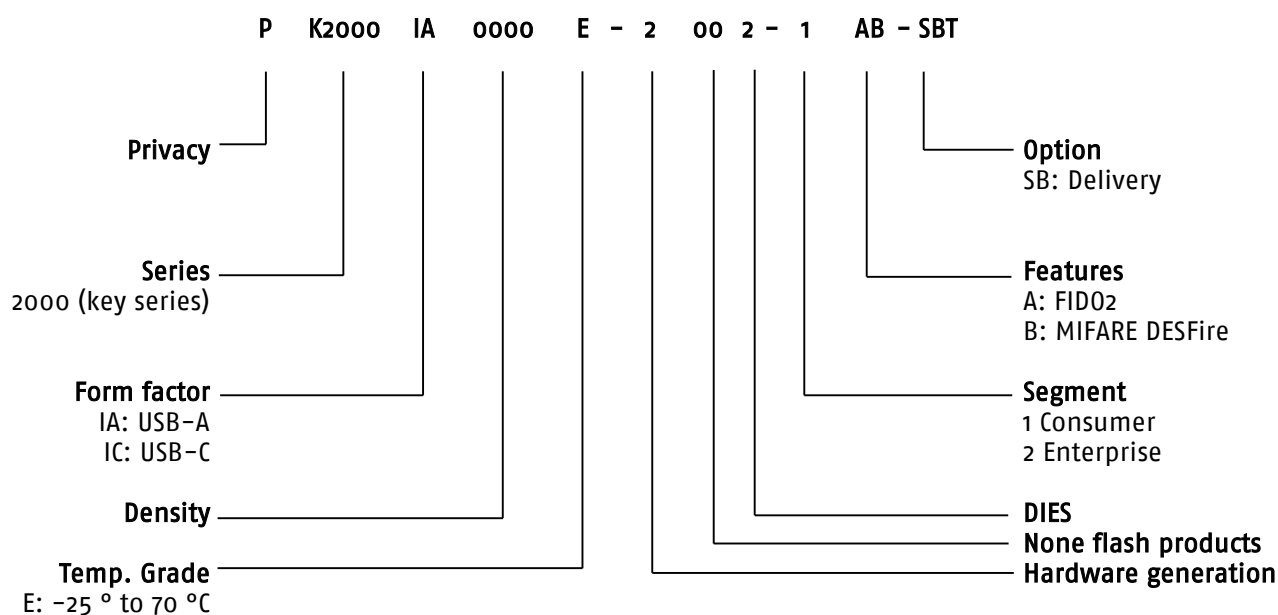

11.1 Delivery

Delivery in single packaging	SBB
Delivery in tray	SBT

12. Marking Specification

Figure 5: iShield Key 2 Series

Lasermarking (front side)	Swissbit iShield Key 2 Series with secured by SB Logo														
	iShield Key 2 Logo: Secured by Swissbit Color: White														
Lasermarking (rear side)	Swissbit iShield Key 2 Series QR-Code, Serial Number, Feature Identifier														
	iShield Key 2 Series QR code Serial Number Human Readable Serial Number Feature Identifier <table><tr><th>Feature</th><th>Marking</th></tr><tr><td>FIPS</td><td>F</td></tr><tr><td>Pro</td><td>P</td></tr><tr><td>MIFARE</td><td>M</td></tr><tr><td>HID</td><td>H</td></tr><tr><td>Legic</td><td>L</td></tr><tr><td>Enterprise</td><td>E</td></tr></table>	Feature	Marking	FIPS	F	Pro	P	MIFARE	M	HID	H	Legic	L	Enterprise	E
Feature	Marking														
FIPS	F														
Pro	P														
MIFARE	M														
HID	H														
Legic	L														
Enterprise	E														

13. Revision History

Table 14: Document Revision History

Date	Revision	Description	Revision Details
10.04.2025	1.0	Initial release	
09.10.2025	1.1	Revision	Corrected Typos
09.01.2026	1.2	Revision	Corrected Typos
17.09.2026	1.3	Revision	Corrected FIDO Certification Level, Description, LEGIC Variants
05.10.2026	1.4	Revision	Added section 7. Contactless / NFC Interface

Disclaimer:

No part of this document may be copied or reproduced in any form or by any means, or transferred to any third party, without the prior written consent of an authorized representative of Swissbit AG ("SWISSBIT"). The information in this document is subject to change without notice. SWISSBIT assumes no responsibility for any errors or omissions that may appear in this document and disclaims responsibility for any consequences resulting from the use of the information set forth herein. SWISSBIT makes no commitments to update or to keep current information contained in this document. The products listed in this document are not suitable for use in applications such as, but not limited to, aircraft control systems, aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. Moreover, SWISSBIT does not recommend or approve the use of any of its products in life support devices or systems or in any application where failure could result in injury or death. If a customer wishes to use SWISSBIT products in applications not intended by SWISSBIT, said customer must contact an authorized SWISSBIT representative to determine SWISSBIT willingness to support a given application. The information set forth in this document does not convey any license under the copyrights, patent rights, trademarks or other intellectual property rights claimed and owned by SWISSBIT. The information set forth in this document is considered to be "Proprietary" and "Confidential" property owned by SWISSBIT.

ALL PRODUCTS SOLD BY SWISSBIT ARE COVERED BY THE PROVISIONS APPEARING IN SWISSBIT'S TERMS AND CONDITIONS OF SALE ONLY, INCLUDING THE LIMITATIONS OF LIABILITY, WARRANTY AND INFRINGEMENT PROVISIONS. SWISSBIT MAKES NO WARRANTIES OF ANY KIND, EXPRESS, STATUTORY, IMPLIED OR OTHERWISE, REGARDING INFORMATION SET FORTH HEREIN OR REGARDING THE FREEDOM OF THE DESCRIBED PRODUCTS FROM INTELLECTUAL PROPERTY INFRINGEMENT AND EXPRESSLY DISCLAIMS ANY SUCH WARRANTIES INCLUDING WITHOUT LIMITATION ANY EXPRESS, STATUTORY OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

© 2026 SWISSBIT AG All rights reserved.